


食品级0.4mm物料PU软管 PL-022

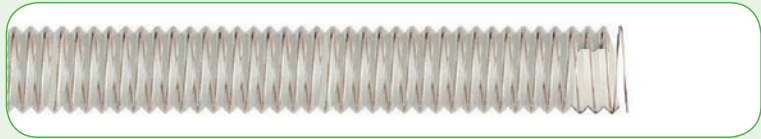

颜色:

- 透明, 带有 PU 覆盖层的螺旋状镀铜钢丝加强

温度:

- 40°C / + 90°C (短时间可耐受 125°C)

技术特性:

- 聚酯型聚氨酯软管, 带有 PU 覆盖层的螺旋状镀铜钢丝加强筋。内表面光滑, 最小壁厚范围从 0.4 至 0.75 毫米。质轻、柔软, 耐磨损、耐矿物油、耐臭氧、耐老化。特别适用于动态的工作环境。不含卤素, 原材料符合 REACH 认证及 RoHS 环保规范。钢丝接地可排静电, 符合 TRB S2153 的排静电标准。

应用:

- 可抽吸小颗粒、碎料、磨损性粉末。特别适用于木工和陶瓷行业的粉料输送以及粉尘吸排。根据欧盟 EC 食品接触标准, 该软管也可用于输送干性食品。

Colour:

- Clear PU with PU coated coppered steel spiral

Temperature range:

- 40°C + 90°C

Features:

- Ester base PU duct reinforced with PU coated high adhesion steel wire. Smooth inside to ensure optimization of flow properties. With a wall thickness from 0,4 to 0,75 mm., It is light and flexible. Resistant to abrasion, mineral oils, weather conditions, ozone and ageing. Especially suitable for dynamic applications. The PU-coated spiral allows more bending sessions than a hose with a not coated steel spiral. Halogen free and with row materials according to REACH, conform to RoHS regulations, can be made antistatic according to TRB S 2153 by grounding the spiral.

Applications:

- Suction of pellets, granulates, abrasive powders and chemicals. In ceramic, suction plants, woodworking and plastic Industry. Suction dry food according to EC Directives.

食品级0.4mm物料PU软管 PL-022

产品编码 No.	内径 in. mm	壁厚 mm	耐负压 mH2O	弯曲半径 mm	体积 m³	重量 kg/m	包装长度 m	
PL-022-1000	1"	25	0.40	2.0	30	0.054	0.140	20
PL-022-1250	1-1/4"	32	0.40	2.0	30	0.065	0.155	20
PL-022-1500	1-1/2"	38	0.40	2.0	30	0.076	0.170	20
PL-022-1580	1-9/16"	40	0.40	2.0	32	0.079	0.180	20
PL-022-1770	*	45	0.40	2.0	36	0.092	0.200	20
PL-022-2000	2"	51	0.40	2.0	40	0.108	0.220	20
PL-022-2360	2-3/8"	60	0.40	1.7	50	0.137	0.255	20
PL-022-2500	2-1/2"	63	0.40	1.7	55	0.143	0.270	20
PL-022-2560	2-9/16"	65	0.40	1.7	56	0.155	0.275	20
PL-022-2760	*	70	0.43	1.7	60	0.175	0.370	20
PL-022-3000	3"	76	0.43	1.7	65	0.245	0.400	20
PL-022-3150	*	80	0.43	1.6	65	0.256	0.420	20
PL-022-3540	*	90	0.43	1.6	75	0.303	0.470	20
PL-022-4000	4"	102	0.53	1.3	85	0.289	0.530	15
PL-022-4330	*	110	0.53	1.2	90	0.320	0.570	15
PL-022-4720	*	120	0.53	1.0	100	0.372	0.615	15
PL-022-5000	5"	127	0.63	1.0	105	0.405	0.760	15
PL-022-5120	*	130	0.63	0.8	105	0.414	0.775	15
PL-022-5510	*	140	0.63	0.8	115	0.504	0.840	15
PL-022-6000	6"	152	0.63	0.8	125	0.544	0.900	15
PL-022-6300	*	160	0.63	0.7	130	0.662	0.945	15
PL-022-7090	*	180	0.63	0.5	150	0.855	1.250	15
PL-022-8000	8"	203	0.63	0.4	165	1.130	1.405	15
PL-022-8980	*	228	0.63	0.4	185	0.933	1.570	10
PL-022-10000	10"	254	0.65	0.4	210	1.188	1.900	10
PL-022-11000	11"	279	0.65	0.4	230	1.480	2.085	10
PL-022-12000	12"	305	0.65	0.3	250	1.613	2.275	10
PL-022-12400	*	315	0.65	0.3	275	1.664	2.350	10
PL-022-14000	14"	356	0.65	0.3	300	-	2.650	-
PL-022-16000	16"	406	0.75	0.3	350	-	3.150	-

