


食品级塑筋增强PU软管 PL-025

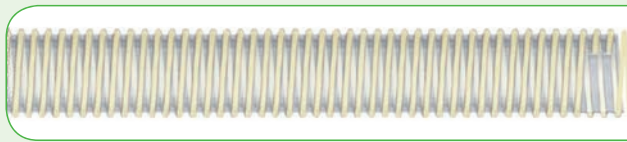

颜色:

- 透明,带象牙色螺旋塑筋加强

温度:

- -20°C/+ 80°C

特性:

- 食品级聚醚型聚氨酯材质管壁,带防震型硬质 PVC 螺旋塑筋加强,内壁平滑,外表面螺旋状纹理。质轻,超级耐磨且抗扭曲性能极佳。耐大多数化学品。

应用:

- 轻质干食品的抽吸和输送。符合 EU10/2011。

Colour:

- Transparent with ivory spiral.

Temperature range:

- -20°C +80°C

Features:

- Ether based food grade PU wall, with antishock rigid PVC spiral. Smooth inside, corrugated outside. Light and extremely soft; free from phthalates and other plasticizers. Resistant to abrasion and flexion, this hose features high mechanical properties. Resistant to many chemicals. Food grade according to EU Reg. 10/2011.

Applications:

- Light suction of food flours, powders and granules with a limited abrasion power.

食品级塑筋增强PU软管 PL-025

| 产品编码 No. | 内径 in. mm | 最小壁厚 mm | 最大壁厚 mm | 耐负压 mH2O | 弯曲半径 mm | 体积 m³ | 重量 kg/m | 每卷长度 m | |
|--------------|-----------------|------------|------------|-------------|------------|----------|------------|-----------|----|
| PL-025-0790 | * | 20.0 | 0.4 | 2.6 | 2.5 | 25 | 0.028 | 0.11 | 20 |
| PL-025-1000 | 1" | 25.0 | 0.4 | 2.6 | 2.5 | 30 | 0.035 | 0.15 | 20 |
| PL-025-1180 | * | 30.0 | 0.4 | 2.6 | 2.5 | 35 | 0.049 | 0.16 | 20 |
| PL-025-1250 | 1-1/4" | 31.8 | 0.4 | 2.6 | 2.0 | 35 | 0.051 | 0.18 | 20 |
| PL-025-1380 | 1-3/8" | 35.0 | 0.5 | 2.7 | 2.0 | 45 | 0.059 | 0.20 | 20 |
| PL-025-1500 | 1-1/2" | 38.1 | 0.5 | 2.8 | 2.0 | 50 | 0.068 | 0.22 | 20 |
| PL-025-1580 | 1-9/16" | 40.0 | 0.5 | 2.8 | 2.0 | 60 | 0.071 | 0.23 | 20 |
| PL-025-1770 | * | 45.0 | 0.5 | 2.9 | 2.0 | 65 | 0.083 | 0.27 | 20 |
| PL-025-2000 | 2" | 50.8 | 0.5 | 3.2 | 2.0 | 70 | 0.104 | 0.32 | 20 |
| PL-025-2170 | * | 55.0 | 0.5 | 3.4 | 2.0 | 75 | 0.119 | 0.40 | 20 |
| PL-025-2360 | 2-3/8" | 60.0 | 0.5 | 3.6 | 1.6 | 80 | 0.170 | 0.47 | 20 |
| PL-025-2500 | 2-1/2" | 63.5 | 0.5 | 3.6 | 1.6 | 80 | 0.180 | 0.51 | 20 |
| PL-025-2560 | 2-9/16" | 65.0 | 0.5 | 3.6 | 1.6 | 90 | 0.191 | 0.52 | 20 |
| PL-025-2760 | * | 70.0 | 0.6 | 3.9 | 1.6 | 95 | 0.293 | 0.56 | 30 |
| PL-025-3000 | 3" | 76.2 | 0.6 | 3.9 | 1.6 | 100 | 0.328 | 0.60 | 30 |
| PL-025-3150 | * | 80.0 | 0.6 | 4.2 | 1.6 | 110 | 0.357 | 0.65 | 30 |
| PL-025-3540 | * | 90.0 | 0.6 | 4.3 | 1.4 | 125 | 0.547 | 0.75 | 30 |
| PL-025-3940 | * | 100.0 | 0.6 | 4.4 | 1.3 | 140 | 0.640 | 0.82 | 30 |
| PL-025-4000 | 4" | 102.0 | 0.6 | 4.4 | 1.3 | 140 | 0.652 | 0.83 | 30 |
| PL-025-4330 | * | 110.0 | 0.6 | 4.7 | 1.2 | 150 | 0.743 | 0.95 | 30 |
| PL-025-4720 | * | 120.0 | 0.6 | 5.0 | 1.0 | 160 | 0.831 | 1.10 | 30 |
| PL-025-5000 | 5" | 127.0 | 0.6 | 5.0 | 1.0 | 170 | 0.900 | 1.15 | 30 |
| PL-025-5120 | * | 130.0 | 0.7 | 5.3 | 0.9 | 170 | 0.780 | 1.30 | 20 |
| PL-025-5510 | * | 140.0 | 0.7 | 5.3 | 0.9 | 180 | 0.860 | 1.43 | 20 |
| PL-025-5970 | * | 151.5 | 0.7 | 5.3 | 0.8 | 200 | 0.953 | 1.50 | 20 |
| PL-025-6300 | * | 160.0 | 0.7 | 6.7 | 0.7 | 220 | 1.049 | 1.94 | 20 |
| PL-025-7090 | * | 180.0 | 0.7 | 6.7 | 0.4 | 250 | 1.236 | 2.14 | 20 |
| PL-025-7870 | * | 200.0 | 0.7 | 6.7 | 0.4 | 260 | 1.440 | 2.30 | 20 |
| PL-025-8000 | 8" | 203.0 | 0.7 | 6.7 | 0.4 | 260 | 1.460 | 2.32 | 20 |
| PL-025-9840 | * | 250.0 | 0.8 | 7.5 | 0.4 | 300 | 0.952 | 3.40 | 10 |
| PL-025-11810 | * | 300.0 | 0.8 | 7.7 | 0.3 | 350 | 1.419 | 4.10 | 10 |

blueFuture
您身边的工业专家