


多用途喷射管 A4-235

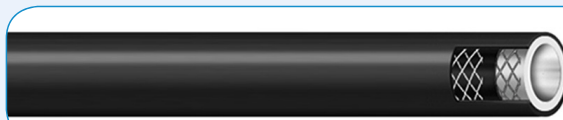

应用:

■ 广泛用于油漆喷涂和农业喷洒领域。用来输送喷漆、汽车烤漆、瓷漆、稀释剂、松节油、空气、油及大多数溶剂和化学品

技术参数:

- 内胶: 尼龙, 不含硅
- 增强层: 合成纱线编织 (1/4" 和 3/8" 为1层编织)(1/2", 3/4" 和 1" 为2层编织)
- 外胶: 黑色合成橡胶, RMA B级中等耐油性

温度:

- -18° C 至 88° C (0° F 至 190° F)

Applications:

■ It is a premium-quality, all-purpose hose for handling a variety of applications such as paint spray or agricultural spray .Will handle spraying paints, automotive finish paints, lacquers, thinners, turpentine, air, oil and a large variety of solvents and chemicals

Technical Description:

- Inner Tube: Nylon, silicone-free
- Reinforcement: Braided synthetic yarn(1/4" and 3/8" -1braid)(1/2", 3/4" and 1" -2" braid)
- Cover: Black synthetic rubber. RMA Class B(Medium oil Resistance)

Temperature:

- 0°F to 190°F(-18°C to 88°C)

多用途喷射管

NR SPRAY

产品编码 No.	内径		外径 mm	工作压力 bar	重量 kg/m	包装长度 m
	in	mm				
A4-235-0250	1/4"	6.4	12.4	51.7	0.12	152.4
A4-235-0310	5/16"	7.9	15.5	51.7	0.19	152.4
A4-235-0380	3/8"	9.5	17.8	51.7	0.22	152.4
A4-235-0500	1/2"	12.7	22.1	51.7	0.33	152.4
A4-235-0630	5/8"	15.9	26.7	51.7	0.46	152.4
A4-235-0750	3/4"	19.1	30.2	51.7	0.54	152.4
A4-235-1000	1"	25.4	38.4	51.7	0.8	152.4

blueFuture

您身边的工业专家