


耐磨排吸水管 CONGO

A5-042

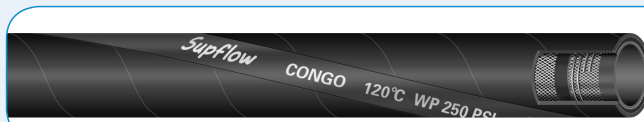

应用：

- 高品质排吸水管，胶管特殊配方使其内层耐磨且防静电。适用于工业、农业、建筑行业，排吸生活用水、工业用水、污水、泥浆和液体肥料等。

技术参数：

- 内层：三元乙丙合成橡胶，黑色，光滑，耐磨，导静电 ($R < 1M \Omega/m$)
- 增强层：高强度合成线绳，内置螺旋钢丝增强
- 外层：三元乙丙合成橡胶，黑色，表面布纹，耐磨，耐候，耐臭氧
- 工作温度：-40°C至+120°C
- 特殊性能：磨耗量低达240mm³

Applications:

- The high-quality drainage pipe and the special formula of the hose make the inner layer wear-resistant and anti-static. It is suitable for industrial, agricultural and construction industries, draining domestic water, industrial water, sewage, mud and liquid fertilizer.

Technical description:

- Tube: EPDM, Black, smooth, abrasion resistant, conductive ($R < 1M \Omega/m$)
- Reinforcement: High tensile textile cord, steel helix
- Cover: EPDM, Black, smooth with cloth impression, abrasion, weather and ozone resistant
- Temperature range: -40°C to +120°C
- Special properties: abrasion ISO4649: 240mm³ max

耐磨排吸水管

CONGO

产品编码 No.	内径 in	mm	外径 mm	工作压力 bar	爆破压力 bar	耐负压 bar	弯曲半径 mm	重量 kg/m	包装长度 m
CONGO-0750	3/4"	19	29	16	48	0.9	76	0.48	60
CONGO-1000	1"	25	35	16	48	0.9	100	0.67	60
CONGO-1250	1-1/4"	32	42	16	48	0.9	128	0.84	60
CONGO-1500	1-1/2"	38	49	16	48	0.9	152	1.06	60
CONGO-2000	2"	51	62	16	48	0.9	204	1.49	60
CONGO-2500	2-1/2"	63	77	16	48	0.9	252	2.23	60
CONGO-3000	3"	76	90	16	48	0.9	304	2.71	60
CONGO-4000	4"	102	117	16	48	0.9	408	3.79	60
CONGO-5000	5"	127	145	16	48	0.9	508	6.04	60
CONGO-6000	6"	152	172	16	48	0.9	760	8.48	60
CONGO-8000	8"	203	229	16	48	0.9	1015	14.00	20
CONGO-10000	10"	254	284	16	48	0.9	1270	19.53	20

